

POLAR 2-40 VACUUM PACKAGING MACHINE



DESCRIPTION:

The robust stainless steel Polar 2-40 vacuum packaging machine comes standard equipped with a Busch vacuum pump. This double chamber machine complies with CE standards.



FEATURES:

- Standard with 2 seal bars (front-back): 2 x 620mm
- Standard double seal (two wires). Optional without extra costs: Cut-off or Wide seal (10 mm)
- Silicone holders easily removable for cleaning and maintenance purposes
- Pump capacity: 63 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-40 sec
- Soft Air to protect the product and vacuum bag
- Standard Digital control with 10 program memory and time control
- Flat work plate
- Comes with insert plates for a faster cycle and product adjustment
- Stainless steel exterior
- IP-65 classification

OPTIONS:

- 1-2 Cut off/Bi-active seal
- Sensor control, Advanced Control System (ACS), Liquid control
- Gas flush (including pressed air connection)
- Preparation for external pump
- Heating element for vacuum valve

ACCESSORIES:

- Zebra ZD410 thermal label printer (only in combination with ACS)
- Inclined insert plate

SEAL BAR CONFIGURATION:



VACUUM PACKAGING MACHINE – POLAR 2-40 – SPEC SHEET



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au


Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia 4129

POLAR 2-40 VACUUM PACKAGING MACHINE



DIMENSIONS (IN MM)

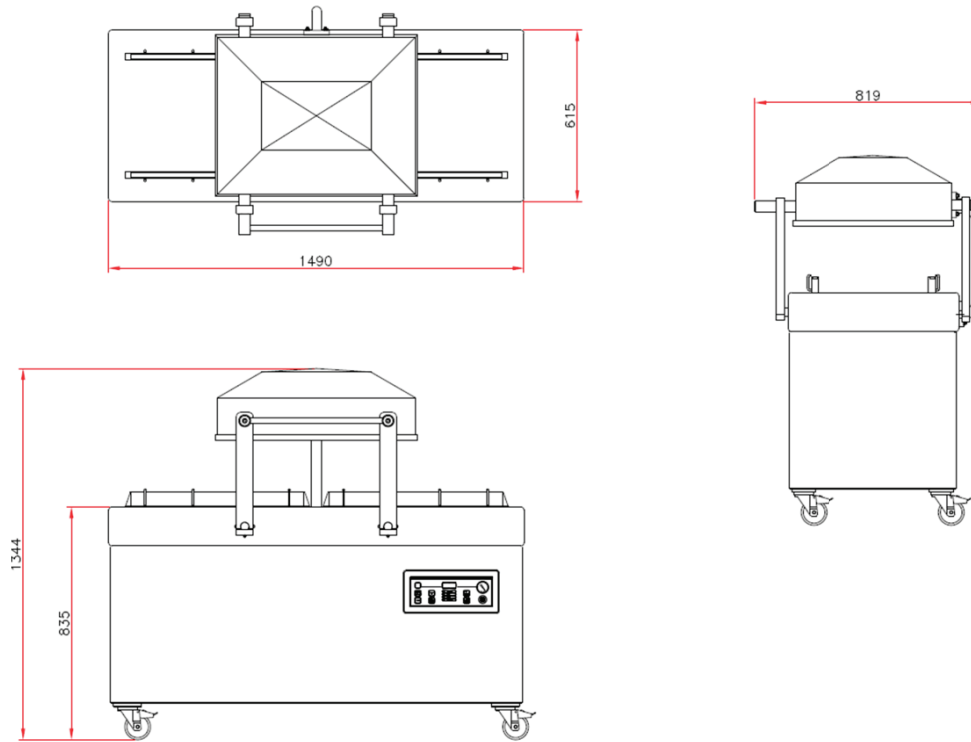

VACUUM PACKAGING MACHINE — POLAR 2-40 — SPEC SHEET

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m3/h)	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
Polar 2-40	400 x 620 x 240	819 x 1490 x 1344	400V-3-50	63	2,1 - 3,0	310

* Other voltages available



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au

Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia
4129