

POLAR 52 VACUUM PACKAGING MACHINE



FEATURES:

- Standard with 2 seal bars: 2 x 520 mm (left/right)
- Standard double seal (two wires). Optional without extra costs: Cut off or Wide seal (10 mm)
- Silicone holders easily removable for cleaning and maintenance purposes
- Pump capacity: 63 m³/h Busch vacuum pump
- Pump maintenance and cleaning program
- Machine cycle: 15-40 sec
- Standard Soft Air to protect the product and vacuum bag
- Standard Digital control with 10 program memory and Time control
- Flat work plate
- Comes with insert plates for a faster cycle and product adjustment
- Stainless steel exterior
- IP-65 Classification

OPTIONS:

- 1-2 Cut off seal
- Bi-active seal
- Sensor control
- Advanced Control System (ACS)
- Liquid control
- Gas flush (including pressed air connection)
- Preparation for external pump

ACCESSORIES:

- Zebra ZD410 thermal label printer (only in combination with ACS)
- Inclined insert plate (for vacuum packing liquids and powders)
- Service kit for standard maintenance

SEAL BAR CONFIGURATION:

Standard



DESCRIPTION:

The robust, stainless steel Polar 52 vacuum packaging machine is standard equipped with a Busch vacuum pump. This floor model complies with CE standards.



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au


Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia 4129

POLAR 52 VACUUM PACKAGING MACHINE



DIMENSIONS (IN MM)

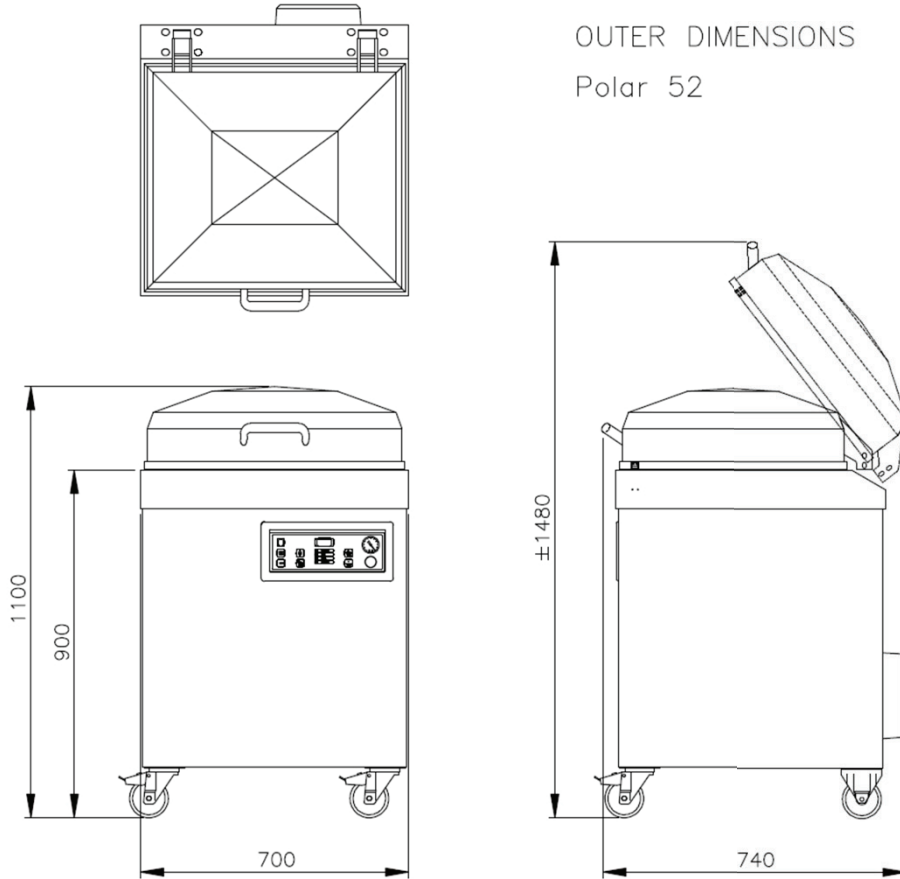

OUTER DIMENSIONS
Polar 52

Model	Dimensions (mm)		Voltage* (Hz)	Pump capacity (m ³ /h)	Power (kW)	Weight (kg)
	Chamber (usable space) L x W x H	Machine L x W x H				
Polar 52	520 x 500 x 200	740 x 700 x 1100	400V-3-50	63	2,4-3,5	183

* Other voltages available

VACUUM PACKAGING MACHINE — POLAR 52 — SPEC SHEET



Sales and Service Support

Phone:
(07) 3806 5972

Email:
sales@vacpac.com.au
service@vacpac.com.au

Visit our Showroom

Unit 3, 14-16 Cairns Street,
Loganholme QLD, Australia
4129